

HARDWARE / SPECIFICATIONS / FEATURES / ACCESSORIES

Compact Standard Console



Column / Wall Console



| | |
|--|--|
| Power Requirements | 115/230V, 15 amp*, 50/60 Hz, 1 ph † |
| Processor | Intel® Core™ i3 - 3.7 Ghz (or greater) |
| Memory | 4 GB of DDR3 SDRAM |
| Hard Drive | 250.0 GB SSD (or greater) |
| DVD-RW/CD-RW Drive | Yes - Standard |
| Monitor Class | 24" Widescreen LCD |
| Wireless Network Module | Optional |
| Operating System | Windows® 10 |
| Supports DSP506T Sensors | Yes - Standard |
| Supports TD Targets | Optional - Requires Premium Key Kit 20-2005-1 (Light Duty Mode Only) |
| Supports HiDef Targets | Yes - Standard (Light Duty Mode Only) |
| Color Ink Jet Printer | Yes - Standard |
| Award-Winning WinAlign® Software | Yes - Standard |
| Vehicle Specifications (30 plus years) | Yes - Standard - 2 Years Free Updates |
| CodeLink® Steering System Reset ** | Optional (Light Duty Mode Only) |
| Complete TPMS Reset Database | Yes - Standard (Light Duty Mode Only) |
| Live Ride Height Adjustment | Optional |
| Fully Integrated Alignment | Yes (FIA Equipped Rack Required) |
| Modified Vehicle Alignment | Optional |
| Vehicle Inspection with Photos | Optional (Light Duty Mode Only) |
| Tools and Kits - Basic Catalog | Yes - Standard (Light Duty Mode Only) |
| Tools and Kits - Video and Photos | Optional (Light Duty Mode Only) |
| Equipment Video Help / Assistance | Optional |
| HunterNet featuring WebSpecs® | Yes - 2 Years Free Standard |
| Training and Productivity Aids | 1,600+ Illustrations, 100+ Animations |
| Steering Wheel Holder | Yes - Standard |
| Brake Pedal Depressor | Yes - Standard |
| Wireless Remote | Yes - Standard |
| Power Line Filter | Yes - Standard |
| Drive-on Camera Compatible | Yes - Standard |
| Support for HD Rolling Compensation | Optional - 20-2005-1 |
| Support for DSP 760T (6 sensor set) | Optional - 20-2005-1 |
| Truck Pusher | Optional (Sold Separately) |
| Powerslide™ turnplates | Optional |
| Internet Connection | Ethernet cable recommended |

* Amperage shown is minimal circuit rating. ** Wireless CodeLink Included (Refer to Form 1708T for coverage information)
 *** VIN Spec Recall for HD Vehicles is not possible due to HD VIN limitations. Quick Check Mode is not currently supported in WinAlign HD but will be supported in a future release. † Isolated Ground Recommended

For HD aligner information visit:
www.hunter.com/hd

For local contact visit:
www.hunter.com/company/findrep.cfm

For general inquiries visit:
www.hunter.com or call 800-448-6848

Continued on Reverse



Because of continuing technological advancements, specifications, models and options are subject to change without notice.

SENSOR COMPATIBILITY

| | DSP760T | DSP740T | DSP506T | HE421 | HS421 | HS401 | DSP600 | DSP700 | DSP500 |
|------------------------------|-----------------------------------|------------------------------------|------------|-----------------------------------|------------|------------|------------|------------|------------|
| WinAlign® Version Required | ✓ V14.2 | ✓ V14.2 | ✓ V14.1 | ✓ V14.1 | ✓ V14.1 | ✓ V14.1 | ✓ V14.1 | ✓ V14.1 | ✓ V14.1 |
| Additional Plus Key Required | Kit 20-2005-1 (448-1016 V2) | Kit 20-2005-1 (*448-1016 V2) | None | Kit 20-2005-1 (448-1016 V2) | None | None | None | None | None |
| | Heavy Duty Sensors | | | Light Duty Sensors | | | | | |

*For Rolling Comp only.

CONSOLE CONFIGURATIONS


| | WT572 | WT522 |
|-------------------|--------------------|--------------------|
| Compact Standard | ✓ | |
| Column/Wall-mount | | ✓ |
| LCD | 24 in. Widescreen | 24 in. Widescreen |
| Width (W) | 32 in. 812 mm | 30.5 in. 775 mm |
| Height (H) | 67 in. 1702 mm | 42 in. 1067 mm |
| Depth (D) | 25 in. 635 mm | 23.5 in. 597 mm |
| Shipping Weight | 285 lbs. 129 kg | 291 lbs. 132 kg |

Space consideration for storage of accessories and targets: For large and compact consoles, add 29 inches to width for TD targets and add 10 inches to depth for rear accessory storage.


If mounting two DSP700T sensors and mini adaptors, add 32 inches to width and 10 inches to depth (front).

If mounting four DSP700T sensors and adaptors, add 32 inches to width, 10 inches to depth (front) and 12 inches to depth (rear).

Compact Standard Console

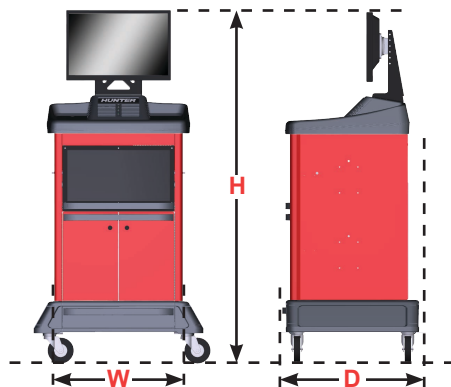

Column / Wall Console

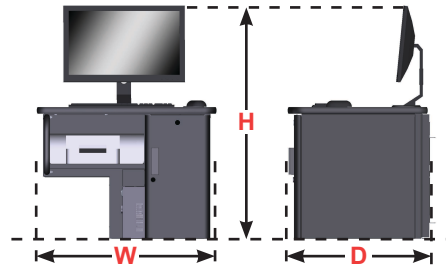

For HD aligner information visit:
www.hunter.com/hd

For local contact visit:
www.hunter.com/company/findrep.cfm

For general inquiries visit:
www.hunter.com or call **800-448-6848**

Because of continuing technological advancements, specifications, models and options are subject to change without notice.